



jayabatten™


Concealed Grid

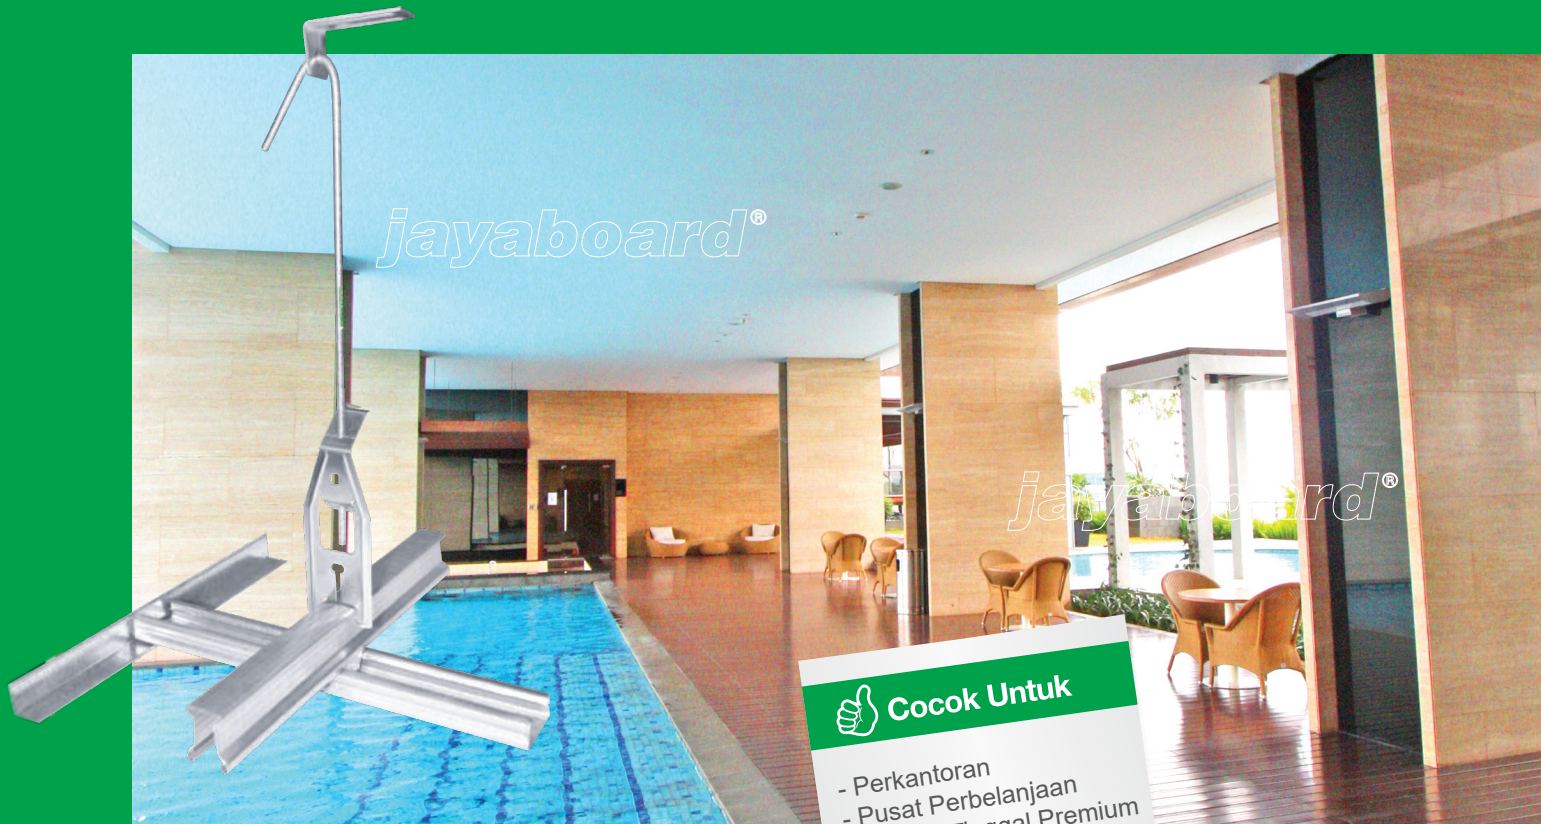

Komponen Utama



Primary Section (3600 mm)
PN 200 30 mm Top Cross Rail 0.4 mm (BMT)



Secondary Section (4800 mm)
PN 203 16 mm Ceiling Batten 0.4mm (BMT)



Primary & Secondary Connectors
PN 209N Ceiling Batten to Top Cross Rail




Perimeter Sections (3000 mm)
PN 212EX 19 x 19 Wall Angle 0.4 mm (TCT)

Aksesoris



Suspension Bracket
PN 220N Suspension Rod to Concrete
PN 221 Suspension Rod to Timber/Steel



Suspension Rods & Nuts
PN 223SS Top Cross Rail Spring Adjusted 4 mm Rod
PN 225 4 mm Soft Galvanised Suspension Rod (3600 mm)
PN 226 5 mm Soft Galvanised Suspension Rod (3600 mm)

+ Safety Factor
min 3X




9mm Jayaboard 9mm

Luas Area Plafon
100m²

kg Performa
Medium Duty

*)Syarat & ketentuan berlaku

Aksesoris



jayaboard®
Kini dan seterusnya

jayaboard.com

PLASTERBOARD

CEILINGS

INTERIOR FINISHES

METAL FRAMING

SUBSTRATES

Hotline : (021) 797 7777 WhatsApp : 08118120205

Jayaboard.id

Jayaboardtube

Jayaboard.id

@jayaboardtwit



jayabatten™



PRODUCT DATA SHEET

1. Karakteristik Rangka


- *Steel Grade* : G300
- *Yield Strength* : Mpa-300min, 340-400 (typical)
- *Tensile Strength* : Mpa-340min, 360-480 (typical)
- *Coating Class* : AZ-50 or Z180*
- *Ketebalan* : Sesuai Spesifikasi

2. Informasi pada Rangka : Kode Produksi, ketebalan x lebar x panjang

3. Dimensi Rangka :

Top Cross Rail	Ceiling Batten
 Part Number : PN 200 Thickness : 0,4mm BMT	 Part Number : PN 203 Thickness : 0,4mm BMT

4. Aksesoris :

Connector	Suspension Clip Adjuster	Suspension Rod
 Part Number : PN 209N Ceiling batten to top cross rail connector	 Part Number : PN 223SS Top cross rail spring adjuster for 4mm rod	 Part Number : PN 225 Ø 4mm soft galva- nized suspension rod

- * - AZ-50 : Zinc-Iron Alloy Coated, ketebalan ± 50 gr/m²
- Z180 : Zinc Coated, ketebalan 150-180 gr/m²

Bahan baku sesuai **SNI**
Pemasangan sistem sesuai dengan ASTM C840

